


# RAMSPLITTER

**The Toughest Log Splitter In the Business**



**Horizontal 3 point Attachment**

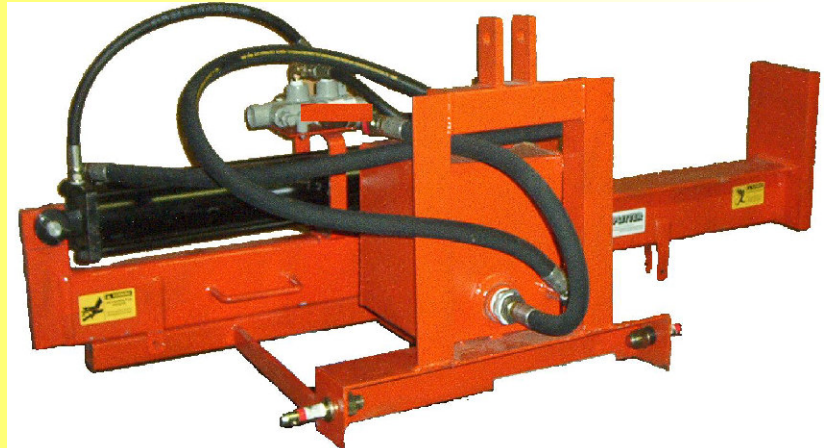

**Horizontal Vertical PTO Pump 3 Point**

## Model for Tractor 3 Point Hitch

Splits logs up to 26 inches long  
up to 40,000 lbs of Ram Pressure  
24 Inch Ram Stroke

4 inch cylinder with a 1 1/2 inch tail rod

"Deadman" switch automatically stops the ram when the handle is released

Control Valve automatically returns to start position after log has been split

Relief valve protects the hydraulic system

Solid rectangular tube beam design for added durability

Brass Wear strips between the ram and the beam for added life of your log splitter

### Optional PTO Pump Attachment



Gear-type, heavy-duty pump is designed for PTO drive operation on tractors of all sizes. No additional gearing is required. These pumps feature self-adjusting wear plates that seal off leakage and offset any wear or expansion that may occur during the life of the pump. High tensile aluminum housing, minimum gear clearance, cast iron endplates. Internal splined shafts go all the way through and are supported on both sides by roller bearings. 21 GPM @ 540 RPM. 1/3/8" 6 - Spline

Please feel free to contact us with any questions:

(866)-967-1965 Fax (815) 986-2977 Email [Sales@Ramsplitter.Com](mailto:Sales@Ramsplitter.Com)

P.O. Box 1523 Rockford, IL 61110